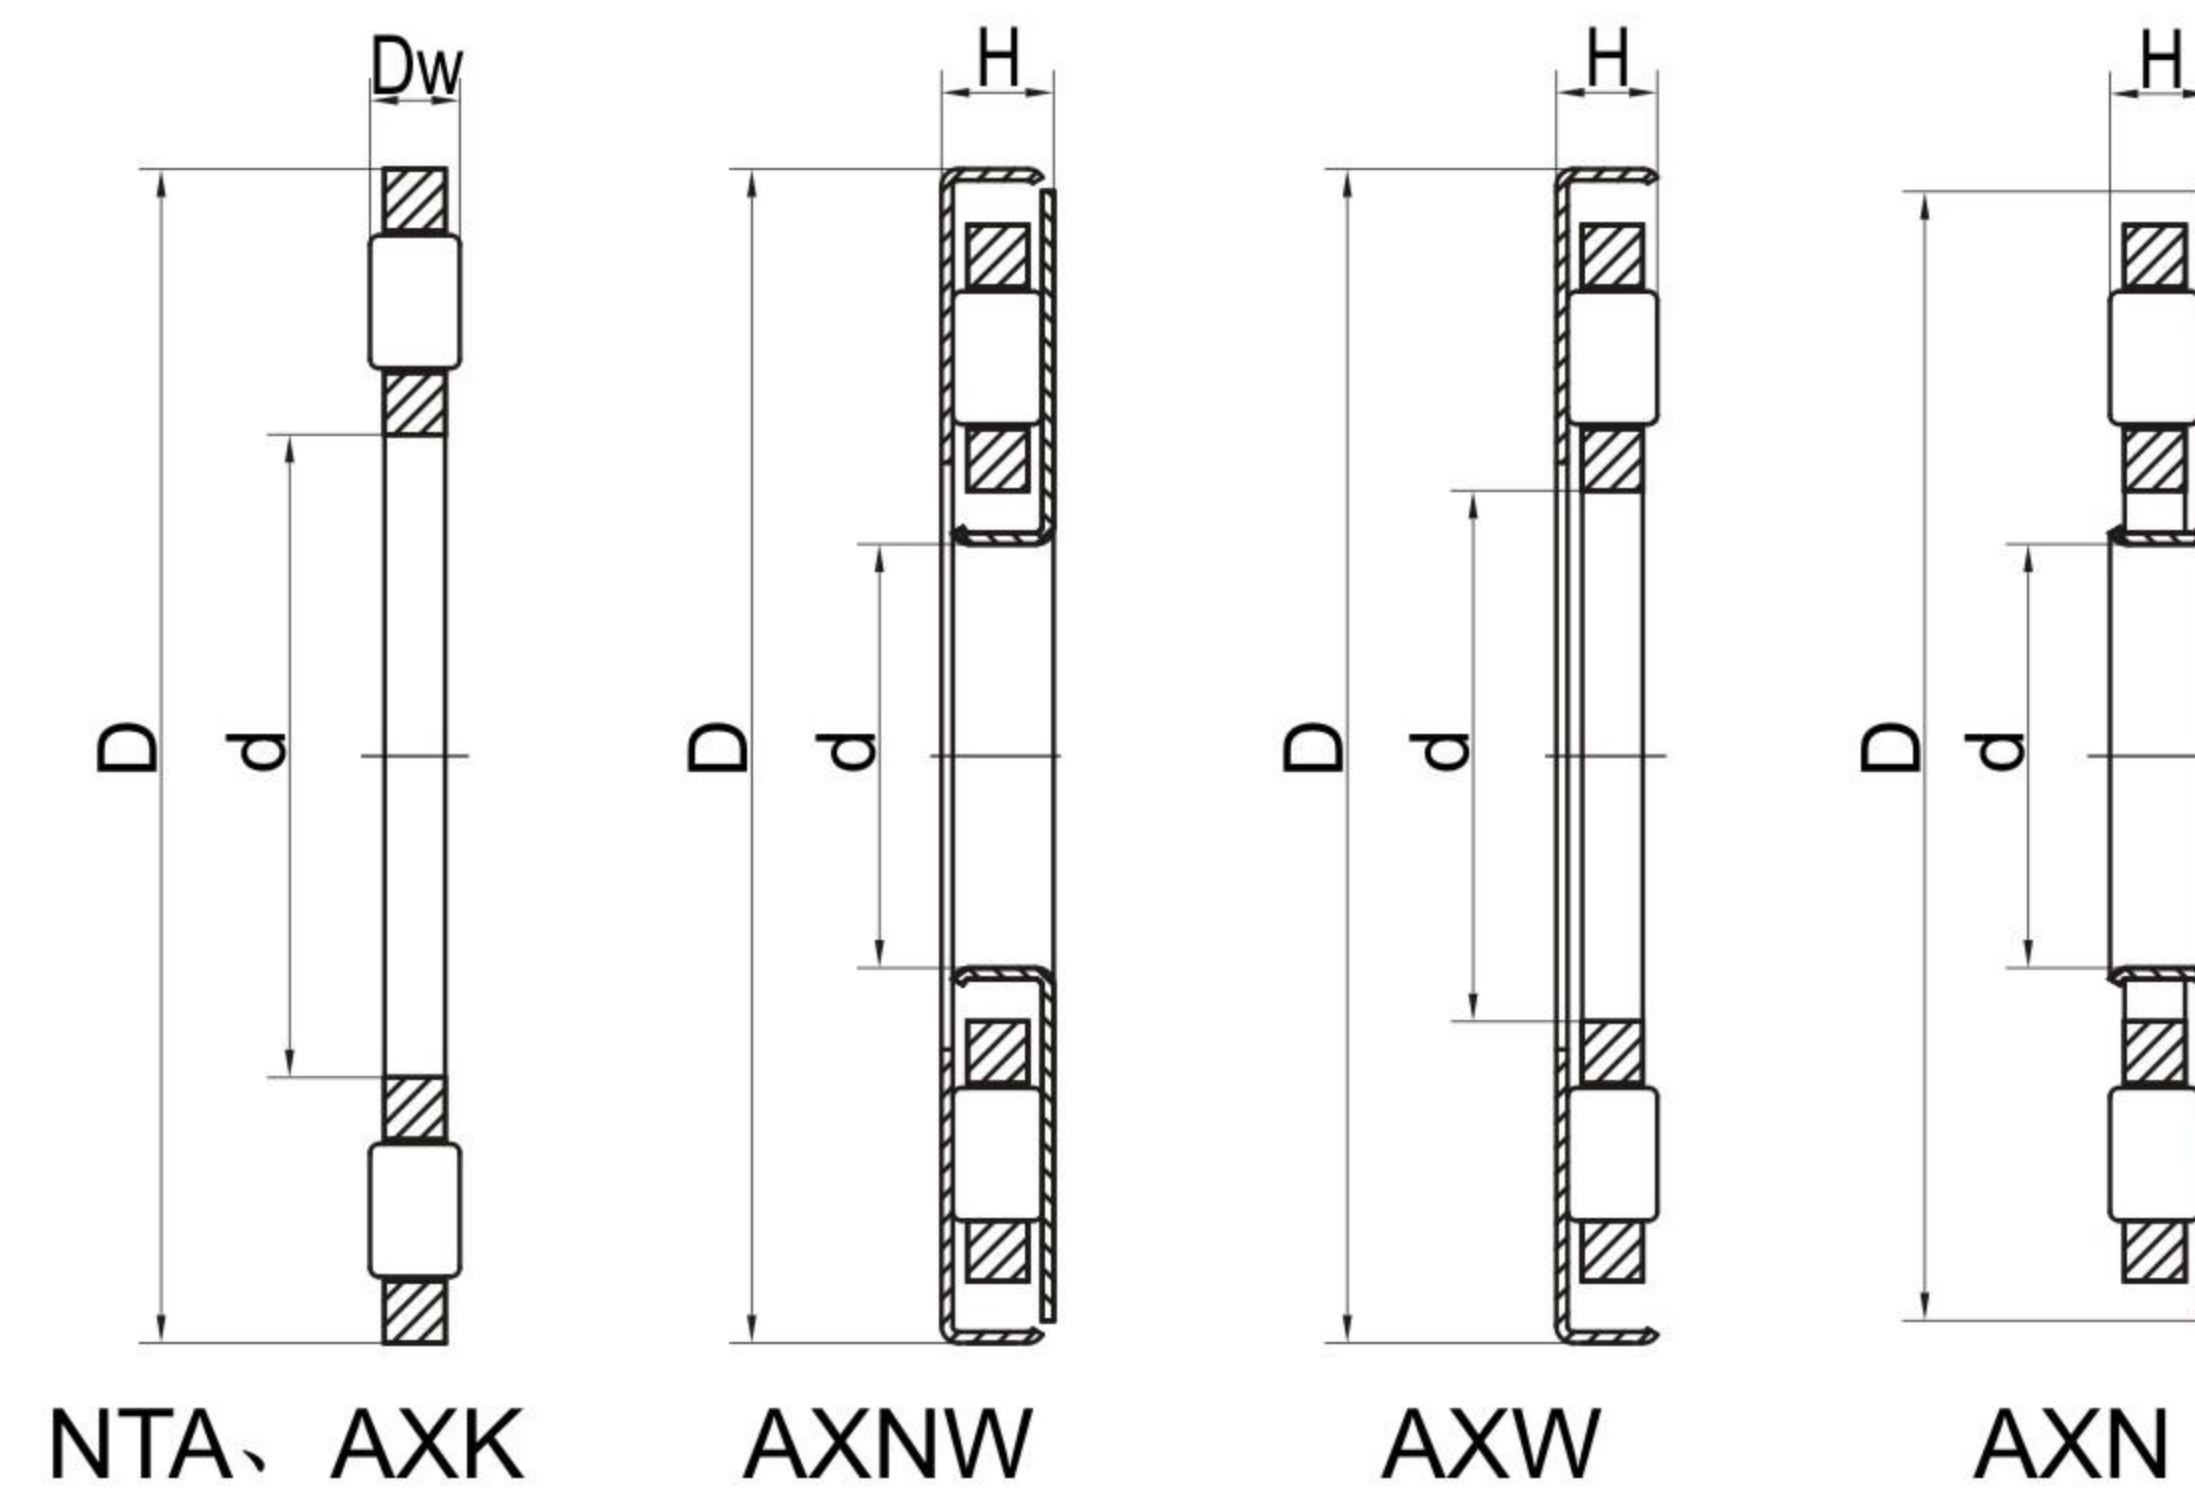


图示 Illustration

产品介绍:

XH推力滚针保持架组件由带滚针或圆柱滚子的推力保持架组件及相应的推力垫圈（根据需要）组成。滚针和圆柱滚子受到推力保持架的保持和引导。推力滚针和保持架组件与不同系列的XH推力片一起使用时，可为轴承的配置提供许多不同的组合。由于选用高精度滚针增加了接触长度，使得此轴承在很小的空间下可获得高负荷能力和高的刚度。如果相邻零件表面适于作为滚道时，则可以省去垫圈。

Product introduction:

XH thrust needle roller and cage assemblies consist of roller and cage assemblies and corresponding thrust washers (if necessary). Needle rollers and cylindrical rollers are guided and maintained by cages. Thrust needle roller and cage assemblies can be used with different series of XH thrust washers to offer more assemblies for bearing arrangement. High-precision needle rollers are used to increase contact length, as a result, bearings obtain high load capacity and stiffness. If surface of adjacent parts can be applied as raceways, washers can be omitted.

基本尺寸(mm) Basic dimension			基本额定载荷(KN) Basic load rating		极限转速脂油 Limit speed Grease / Oil		产品代号 Product designation	重量 Weight
d	D	Dw	Cr	Coa	脂 / 油 Grease / Oil min-1	W≈g		
9.525	20.625	1.984	5.6	14.7	3800	15000	NTA 613	2.5
10	24	2	7.8	23.6	3600	14000	AXK 1024	2
12	26	2	8.5	27.0	3200	13000	AXK 1226	3
15	28	2	9.7	33.5	3000	12000	AXK 1528	3
17	30	2	10.2	36.5	2800	11000	AXK 1730	3
17.462	40.481	1.984	15.4	69.4	1800	7000	NTA 1125.5	9.7
20	35	2	11.2	43.0	2200	8500	AXK 2035	5
22	35	2	6.0	8.0	2200	8500	AXK 2235	5.4
	37.75	2	7.2	10.2	1900	7500	AXK 2237.75	6.8
22.225	36.116	1.984	7.0	9.7	1900	7500	NTA 1422.75	6.1
25	42	2	12.5	54.0	1800	7000	AXK 2542	6
28	42	2	7.8	11.9	1800	7000	AXK 2842	6.8
30	47	2	14.0	65.5	1500	6000	AXK 3047	7
31.5	47	2	8.3	13.6	1500	6000	AXK 31.547	5.2
31.75	49.2	2	10.5	18.3	1500	6000	NTA 2031	10.6
32.6	47	3	12.2	16.7	1500	6000	AXK 32.647	13.3
33	52	2	16.0	76.6	1400	5600	AXK 3352	6.3
	51	4	13.8	64.3	1100	4500	935 AXNW型	

基本尺寸(mm) Basic dimension			基本额定载荷(KN) Basic load rating		极限转速脂油 Limit speed Grease / Oil		产品代号 Product designation	重量 Weight
d	D	Dw	Cr	Coa	脂 / 油 Grease / Oil min-1	W≈g		
35	52	2	15.3	76.5	1400	5600	AXK 3552	8
	55	3.175	26.3	113.4	1200	4800	AXK 3555	17.6
36	53	2	16.0	76.6	1400	5600	AXK 3653	6
	55	5	73.2	121.0	1000	4000	AXK 3655	27.9
40	60	3	24.5	110.0	1200	4500	AXK 4060	16
44.45	63.5	1.984	23.6	137.8	1400	5300	AXK 44.563.5	12.8
45	65	2	12.2	25.0	1400	5300	AXK 4565K	15.5
	65	3	26.5	125.0	1200	4500	AXK 4565K	18
50	70	3	28.0	137.0	1000	3800	AXK 5070	20
55	78	3	36.0	196.0	900	3600	AXK 5578	26
60	85	3	39.0	240.0	820	3400	AXK 6085	35
65	90	3	40.5	260.0	800	3200	AXK 6590	36
70	95	4	50.0	260.0	750	3000	AXK 7095	55
75	100	4	51.0	275.0	700	2800	AXK 75100	58
80	105	4	52.0	285.0	670	2600	AXK 80105	60
85	110	4	54.0	300.0	670	2600	AXK 85110	63
90	120	4	67.0	415.0	600	2400	AXK 90120	80
91	113	3	38.0	242.0	600	2400	AXK 91113	38.4
95.25	117.475	3.175	28.6	68.2	600	2400	AXK 6074	50.5
10	135	4	78.0	560.0	500	2000	AXK 100135	106
110	145	4	81.5	600.0	480	1900	AXK 110145	117
120	155	4	82.0	655.0	450	1800	AXK 120155	126
130	170	5	112.0	830.0	400	1600	AXK 130170	200
140	180	5	116.0	900.0	400	1500	AXK 140180	210
150	190	5	120.0	950.0	350	1400	AXK 150190	230
160	200	5	125.0	1000.0	350	1300	AXK 160200	240